




Typical Platform Capacity

Source Water	Single Module MGD/ (MLD)
Ground	0.19 / (0.7)
Surface & Waste	0.09 / (0.36)

Performance & Equipment Specifications *

Duty	>99%	Control	Fully Automated with Remote
Automatic Turndown	0-100% Automatic	Membrane Life	25 Years
Filtrate Loss	0%	Wetted Material	Stainless Steel
Operating Modes	Continuous on Demand	UL Certified	NSF/ANSI 61
Filtration Modes	Pressurized or Gravity Feed	Gasket Material	Viton or EPDM
Concentrate	Zero Liquid Discharge Carbon Capture	NEC	NFPA70, NFPA79 NFPA496, UL508A
Duty	>99%	Control	Fully Automated with Remote

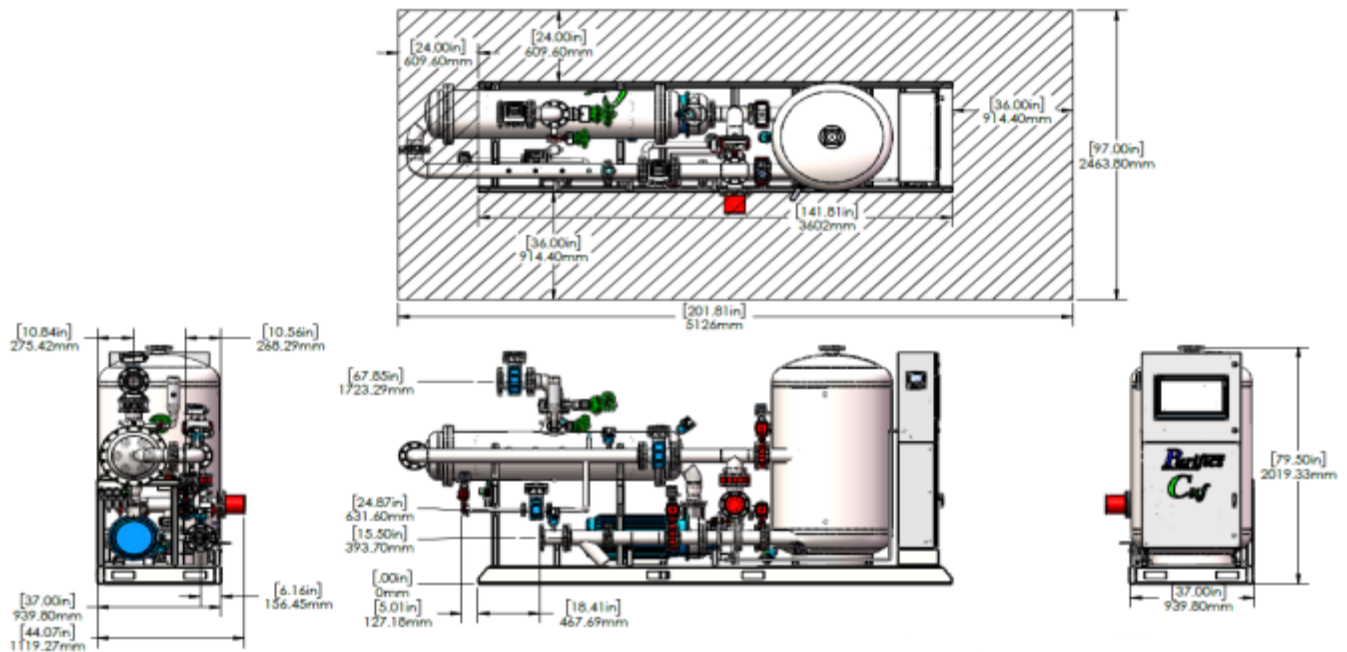

Application Engineering Data

Power	480 Volt, 3Ø, 50/60Hz 50 FLA	Inlet Flange	3" #150 2" #150	0.24 MGD 0.17 MGD
Network	Profinet	Outlet Flange	3" #150 2" #150	0.24 MGD 0.17 MGD
Instrument Air	Oil Free 120 PSI, 8 Bar	Concentrate Flange	1" #150	
Weight Dry/Wet	2,200/3,300 LBS 1,000/1,500 KG	Air Supply	1/4" NPT	

*Disclaimer- specifications may change with each application.